



Gusto Hugger

MODERN FAN COMPANY
Customer Service
M-F 8am - 4pm (PST)


(ph) 888.588.3267
www.modernfan.com

Gusto Hugger Fan- Installation instructions


Should you have any questions or difficulty installing your new fan, please contact Modern Fan Co. customer service immediately.

Note: Power supply must be turned off prior to any contact with electrical wires. It is recommended that a licensed electrician be hired to install your ceiling fan.

(1) Remove and identify contents of carton.

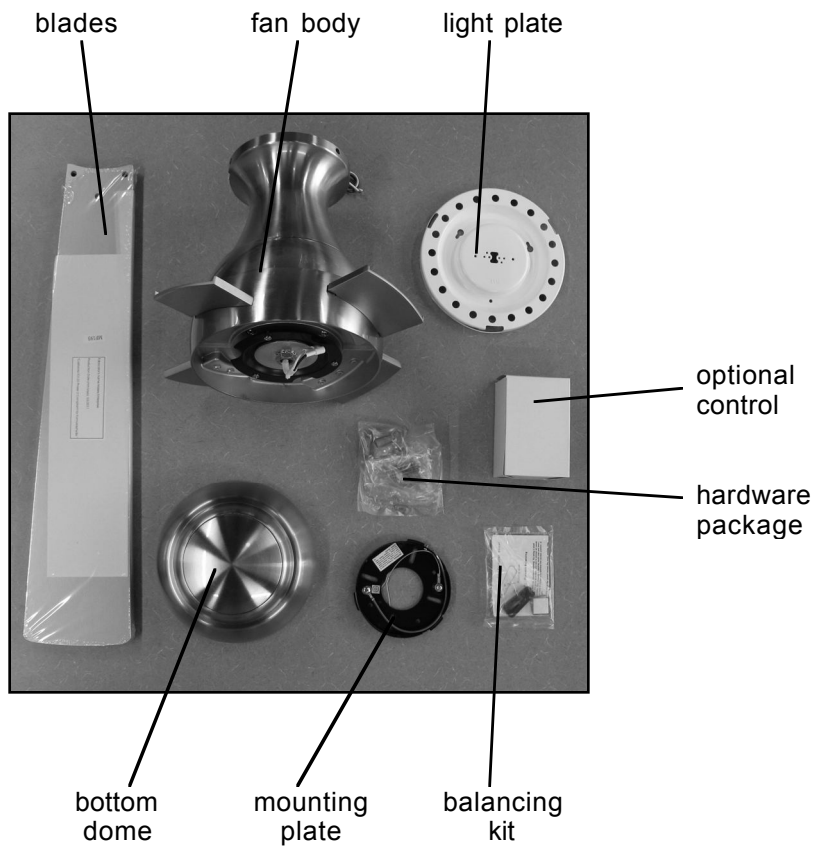


(2) Using machine screws and washers from hardware package or existing screws in junction box, securely attach mounting plate to ceiling junction box.



(3) Place fan body on packaging material, bottom side up. Remove one of the three screws on the black flange and set aside for reinstallation in step (4). Loosen, but don't remove, the remaining two screws.

flange



(4) Route wire leads through center hole in light plate. Align larger holes on light plate over the two loose screws from step (3) above. Rotate light plate clockwise to align third hole. Insert and tighten third screw from step (3) above. Tighten remaining two screws.



(5) Carefully turn fan body over, and replace on packaging material. Using blade screws and washers from hardware package, secure each of four blades to rotor arms.



(6) Suspend fan from mounting plate using security cable loop and washer hook.



security cable


washer hook



(7) With fan safely suspended by cable, make wire connections with wire nuts included in hardware package as described in the **Control Installation Instructions**. If using optional #003, #004 or #005 controls, the receiving unit should be placed inside the top of the fan and connected at this time.

(8) Lift fan body and carefully align collar with ceiling plate. Tabs on ceiling plate should seat into channel on inside of fan collar. Rotate fan so that set screw holes on fan body align with set screw holes on ceiling plate.

set screw hole



(9) Insert and firmly tighten three set screws.


Note- Do not tighten down set screws until all three are partly screwed in.




(10) If installing a light kit, proceed to step (11). Otherwise, install bottom dome by aligning tabs with slots in white light plate and rotating clockwise until firmly attached.




(11) To install optional light kit, begin by identifying all parts. Then follow steps (a) through (d):

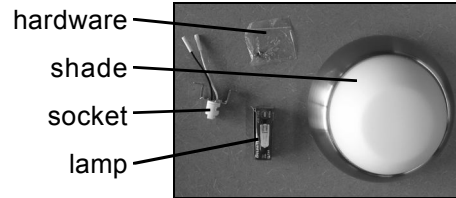


(a) Connect wire leads from socket to wire leads from fan.




(b) Attach socket to fan with two screws. Tuck extra wire into housing.



(c) Insert lamp:
75W G-9 or
26W GU-24 CFL



(d) Attach shade by aligning tabs with slots in white light plate and rotating clockwise until firmly attached.



Note: Do not touch G9 lamp with bare fingers.

(13) Your fan is reversible for summer and winter operation. The reverse switch is located on the side of the fan body. When reading the REVERSE label, the LEFT position is for summer and the RIGHT position is for winter. You may have to use a pencil or screw driver to reach or maneuver the switch.



(14) The rotor and motor of your fan have been dynamically balanced at the factory. In addition, the blades have been matched to the nearest gram to ensure a well balanced ceiling fan. Furthermore, a blade balancing kit has been included with your fan. Please refer to the instructions packaged with the balancing kit should your fan require additional balancing.
