



Aurora Hugger

MODERN FAN COMPANY
Customer Service
M-F 8am - 4pm (PST)


(ph) 888.588.3267
www.modernfan.com

Aurora Hugger Fan- Installation instructions

Should you have any questions or difficulty installing your new fan, please contact Modern Fan Co. customer service immediately.


NOTE: The Aurora Hugger uses a fluorescent lamp and is not compatible with dimmers or dimming switches of any kind. Only on/off switching can be used for the lighting component of this fan.

(1) Remove and identify contents of carton.

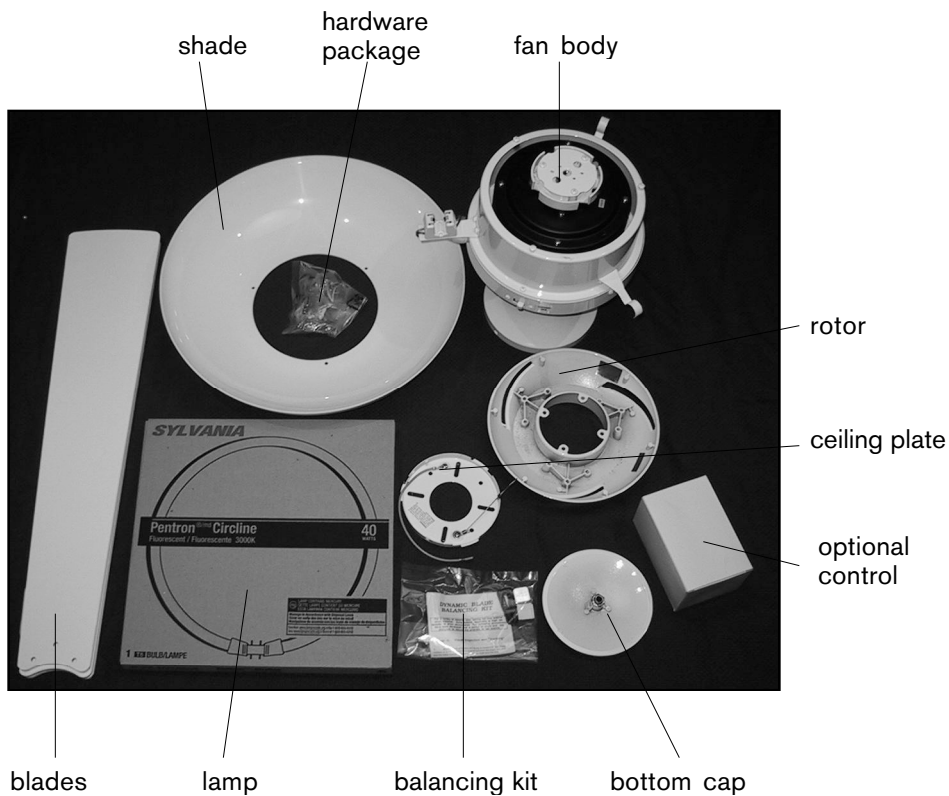

(2) Using the existing screws from your junction box, or the machine screws from the hardware package, secure the ceiling plate to ceiling junction box. The electrical wire must be accessible through the hole in the center of the ceiling plate.


suspension cable and loop

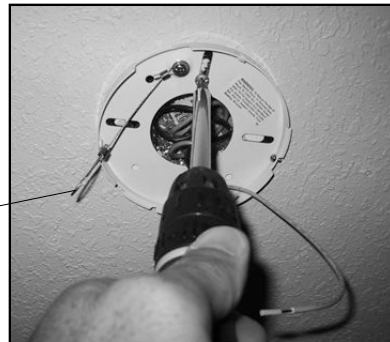

(3) Secure suspension cable loop around the hook inside the top of the fan body.


hook

With fan safely suspended by cable, make wire connections with wire nuts included in hardware package. If using the optional #003 or #004 control, the receiving unit should be connected at this time and placed inside the top of the fan as described in the control installation instructions.

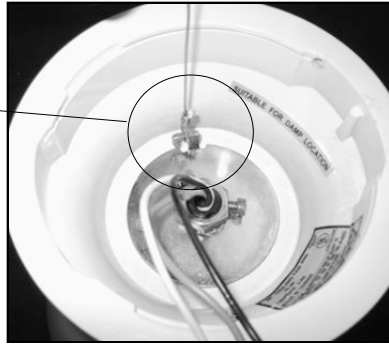

(4) Lift fan body and carefully align collar with ceiling plate. Tabs on ceiling plate should seat into channel on inside of fan collar. Rotate fan so that set screw holes on fan body align with set screw holes on ceiling plate.

set screw hole

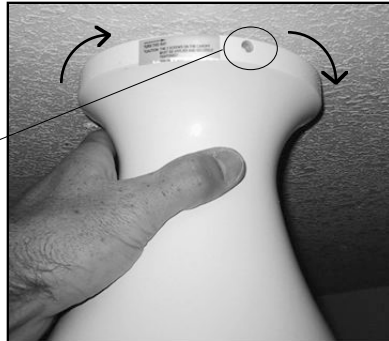


(5) Insert and firmly tighten three set screws. Hint- do not tighten down set screws until all three are partly screwed in.



(6) Carefully insert the lamp into the socket and the two lamp holders. The brass pins on the lamp snap into the socket.

socket

holder

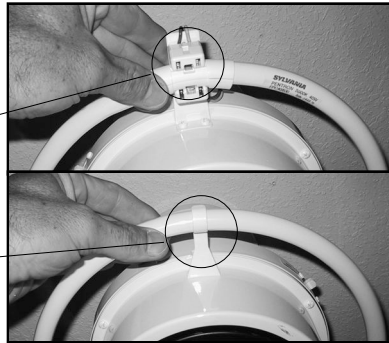


(7) Remove the three white shade screws from the outer edge of the fan housing. Then use the same three screws to attach the shade to the fan body. **Caution:** Do not over tighten. Over tightening may cause the acrylic shade to crack.




(8) After attaching the shade as described in step **(7)**, remove the four rotor screws from the fan motor. Keep these screws for step **(10)**.

reinstalled shade screw


remove rotor screws

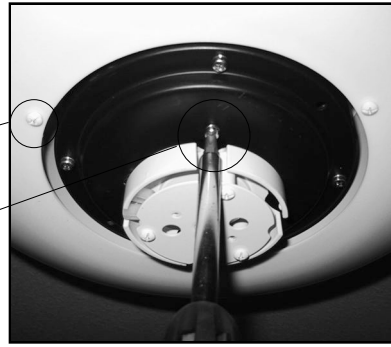


(9) Carefully insert blades into rotor slots, and using pan head screws from hardware package, secure blades to rotor.

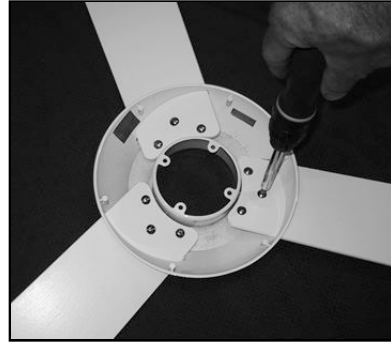

(10) Install rotor using the four rotor screws from step **(8)**. Be sure screw tabs on rotor are properly aligned with correct holes on motor.

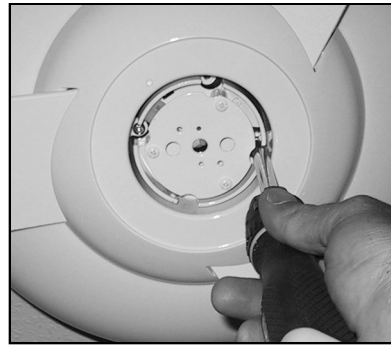

(11) Attach bottom cap by rotating on in the clock wise direction.

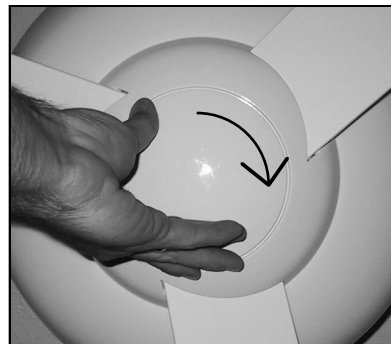

(12) Your fan is reversible for summer and winter operation. The reverse switch is located on the side of the fan body, above the shade and lamp assembly. The LEFT position is for summer and the RIGHT position is for winter.

(13) Install wall switch as described in the control installation instructions.
NOTE: The Aurora Hugger uses a fluorescent lamp and is not compatible with dimmers or dimming switches of any kind. Only on/off switching can be used for the lighting component of this fan.

(14) The rotor and motor of your fan have been dynamically balanced at the factory. In addition, the blades have been matched to the nearest gram to ensure a well balanced ceiling fan. Furthermore, a blade balancing kit has been included with your fan. Please refer to the instructions packaged with the balancing kit should your fan require additional balancing.
