



Gusto

MODERN FAN COMPANY
Customer Service
M-F 8am - 4pm (PST)


(ph) 888.588.3267
www.modernfan.com

Gusto Fan- Installation instructions

Should you have any questions or difficulty installing your new fan, please contact Modern Fan Co. customer service immediately.

Note: Power supply must be turned off prior to any contact with electrical wires. It is recommended that a licensed electrician be hired to install your ceiling fan.

(1) Remove and identify contents of carton.

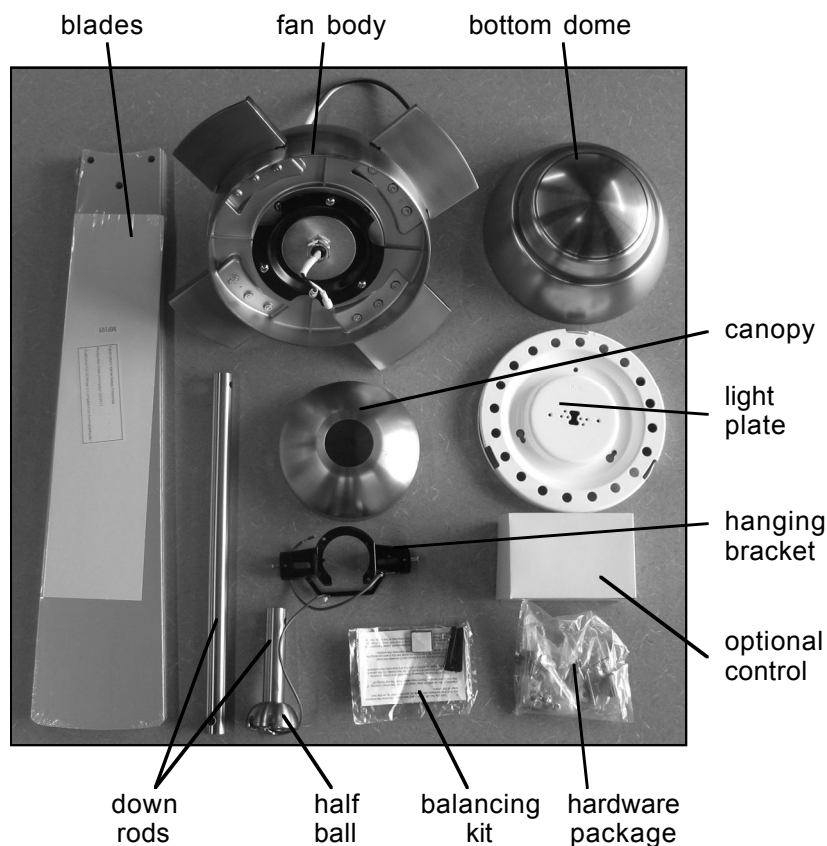


(2) Using machine screws from hardware package or existing screws in junction box, securely attach hanging bracket to ceiling junction box.




(3) Place fan body on packaging material, bottom side up. Remove one of the three screws on the black flange and set aside for reinstallation in step (4). Loosen, but don't remove, the remaining two screws.

flange



(4) Route wire leads through center hole in light plate. Align larger holes on light plate over the two loose screws from step (3) above. Rotate light plate clockwise to align third hole. Insert and tighten third screw from step (3) above. Tighten remaining two screws.




(5) Carefully turn fan body over, and replace on packaging material. Using blade screws and washers from hardware package, secure each of four blades to rotor arms.




(6) Remove stopper pin and half ball from small down rod by loosening set screw on half ball. Set parts aside for reinstallation in step (10).

stopper pin
set screw



(7) Remove the stopper screw and loosen the set screw on the fan collar. Set the stopper screw aside for step (8).

stopper screw
set screw




(8) Run fan wires through selected down rod. Reinstall stopper screw from step (7) and firmly tighten set screw on fan collar against down rod.

Note: If ceiling height allows, using a longer down rod will increase airflow and efficiency.



(9) Slide fan canopy over down rod and carefully rest on top of fan body.

canopy



(10) Reinstall half ball from step (6) on end of down rod. Be sure that stopper pin is inserted through down rod and seated in half ball. Tighten set screw against down rod.

set screw
stopper pin



(11) Lift fan to ceiling and set half ball in the hanging bracket so that the ridge on the edge of the hanging bracket is seated in the slotted channel in the half ball.

channel and ridge



(12) With fan safely suspended by bracket, make wire connections with wire nuts included in hardware package as described in the **Control Installation Instructions**. If using optional #003, #004 or #005 controls, the receiving unit should be placed inside the arms of the hanging bracket and connected at this time.

(13) Loosen set screws on the sides of the hanging bracket. Lift canopy to ceiling. Align slots on side of canopy with set screws on hanging bracket, rotate canopy and tighten set screws to hold canopy in place.

set screw



(14) If installing a light kit, proceed to step **(15)**. Otherwise, install bottom dome by aligning tabs with slots in white light plate and rotating clockwise until firmly attached.




(15) To install optional light kit, begin by identifying all parts. Then follow steps (a) through (d):

hardware


shade

socket


lamp




(a) Connect wire leads from socket to wire leads from fan.




(b) Attach socket to fan with two screws. Tuck extra wire into housing.



(c) Insert lamp:
75W G-9 or
26W GU-24 CFL



(d) Attach shade by aligning tabs with slots in white light plate and rotating clockwise until firmly attached.



Note: Do not touch G9 lamp with bare fingers.

(16) Install optional wall control as described in the control installation instructions.

(17) Your fan is reversible for summer and winter operation. The reverse switch is located on the top of the fan body. When reading the REVERSE label, the LEFT position is for summer and the RIGHT position is for winter.

reverse switch



(18) The rotor and motor of your fan have been dynamically balanced at the factory. In addition, the blades have been matched to the nearest gram to ensure a well balanced ceiling fan. Furthermore, a blade balancing kit has been included with your fan. Please refer to the instructions packaged with the balancing kit should your fan require additional balancing.